

WIKAI Alexander Wiegand SE & Co. KG
 PF 1180 • 63908 Klingenberg • Germany

DELTA TECH GmbH
 Farshad Shoarian
 ALSTER TOWER
 Lübecker Straße 1
 22087 Hamburg
 Germany

Delivery address
 Engemann u. Co Internationale Spedition GmbH
 For Alfons Köster / in order Delta GmbH
 Otto-Hahn-Str. 29
 40721 Hilden
 Germany

Quotation

Q110060001-5

20/09/2024

Customer no.	43327028		
Inquiry no.	RFQ for Instruments- PR 200	Contact	Namrata Tayade
Reference	RFQ for Instruments- PR 200	E-Mail	Namrata.Tayade@wika.com
Inquiry date	23/07/2024		
Contact	Farshad Shoarian		
E-Mail	planning@delta-gmbh.eu		
VAT-No.	DE4871404580		
Terms of payment	30 days net	Mode of delivery	Special Agreement
Discount	no cash discount	Terms of delivery	EXW - EX Works
Currency	EUR		

 Note:For tags LS-RU0001A-01, LS-RU0001B-01, we have not offered the Level switch, as it is not clear from the specifications, which type of the float is required.

Position overview

Line	Qty	Unit	Item	Your item number	Delivery time	Unit price	per	Net value
010	2,0000	Pcs			~ 10 weeks	415,96	/1	831,92
			233.30.100 -1/+24 barg 1/2 NPT lower mount					
020	2,0000	Pcs			~ 10 weeks	1.917,21	/1	3.834,42
			IPT-20, -1...+40 bar gauge, Thread 1/2NPT PN1000, ASME B1.20.1 / 316L Sealing: without, -40 ... +105°C, 4...20 mA/HART , ATEX II 1G Ex ia IIC T6...T1 Ga					
030	8,0000	Pcs			~ 10 weeks	1.917,21	/1	15.337,68
			IPT-20, -1...+40 bar gauge, Thread 1/2NPT PN1000, ASME B1.20.1 / 316L Sealing: without, -40 ... +105°C, 4...20 mA/HART , ATEX II 1G Ex ia IIC T6...T1 Ga					
040	2,0000	Pcs			~ 10 weeks	1.917,21	/1	3.834,42
			IPT-20, -1...+40 bar gauge, Thread 1/2NPT PN1000, ASME B1.20.1 / 316L Sealing: without, -40 ... +105°C, 4...20 mA/HART , ATEX II 1G Ex ia IIC T6...T1 Ga					

WIKAI Alexander Wiegand SE & Co. KG
 Alexander-Wiegand-Straße 30
 63911 Klingenberg
 Germany
 Phone +49 9372 132-0
 Fax +49 9372 132-406
 info@wika.de
 www.wika.de
 WEEE-Reg-Nr. DE 92770372
 VAT.No.: DE131878642

Limited partnership company:
 Place of business Klingenberg
 Local court Aschaffenburg HRA 1819
 General partner:
 WIKAI International SE – Pob Klingenberg
 Local court Aschaffenburg HRB 10505
 Chairman of the board: Alexander Wiegand
 Chairman of the supervisory board: Prof. Dr. Roderich C. Thümmel

Bank account:
 Commerzbank Aschaffenburg
 BIC: COBADEFF795
 IBAN DE57 7954 0049 0104 1177 00
 Sparkasse Aschaffenburg Miltenberg
 BIC: BYLADEM1ASA
 IBAN: DE95 7955 0000 0430 1062 94
 Sydbank (DKK Payments)
 BIC: SYBKDK22
 IBAN: DK02 8072 0001 0403 60



Quotation **Q110060001-5**
43327028 DELTA TECH GmbH, Hamburg

Page 2 / 21
20/09/2024

Line	Qty Unit	Item	Your item number	Delivery time	Unit price	per	Net value
060	2,0000 Pcs	TR12-B, Ex i, 1xPt100, 3-w, Cl.A, -100...+450°C, Ø 6 mm, T32		~ 10 weeks	1.468,10	/1	2.936,20
070	2,0000 Pcs	TR12-B, Ex i, 1xPt100, 3-w, Cl.A, -100...+450°C, Ø 6 mm, T32		~ 10 weeks	1.447,07	/1	2.894,14
080	2,0000 Pcs	TR12-B, Ex i, 1xPt100, 3-w, Cl.A, -100...+450°C, Ø 6 mm, T32		~ 10 weeks	1.559,28	/1	3.118,56
090	2,0000 Pcs	BNA-2"/300/RF-MG-M1,220-L60x2.77-MRFV/SVP-ZTSS355/PN25/R48H-Ex		~ 10 weeks	10.351,56	/1	20.703,12
100	2,0000 Pcs	LGG-RP#R207M762V		~ 10 weeks	2.934,76	/1	5.869,52
110	2,0000 Pcs	TLS-ADNPTV-3/4"-JT-L90		~ 10 weeks	663,24	/1	1.326,48
120	1,0000 Pcs			from stock	590,00	/1	590,00
130	1,0000 Pcs			from stock	600,00	/1	600,00
140	1,0000 Pcs			from stock	590,63	/1	590,63
150	6,0000 Pcs	Digital temperature transmitter T32		2-3 weeks	725,29	/1	4.351,74
160	1,0000 Pcs			from stock	1.200,00	/1	1.200,00

EUR

Net value of goods	68.018,82
Discount	-11.056,56
Position markup	221,70
Packaging	569,62
Total net amount	57.753,58
VAT not included	

* For discounts and surcharges, please see detailed quote on next page(s).

WIKAI Alexander Wiegand SE & Co. KG
Alexander-Wiegand-Straße 30
63911 Klingenberg
Germany
Phone +49 9372 132-0
Fax +49 9372 132-406
info@wika.de
www.wika.de
WEEE-Reg-Nr. DE 92770372
VAT.No.: DE131878642

Limited partnership company:
Place of business Klingenberg
Local court Aschaffenburg HRA 1819
General partner:
WIKAI International SE – Pob Klingenberg
Local court Aschaffenburg HRB 10505
Chairman of the board: Alexander Wiegand
Chairman of the supervisory board: Prof. Dr. Roderich C. Thümmel

Bank account:
Commerzbank Aschaffenburg
BIC: COBADEFF795
IBAN DE57 7954 0049 0104 1177 00
Sparkasse Aschaffenburg Miltenberg
BIC: BYLADEM1ASA
IBAN: DE95 7955 0000 0430 1062 94
Sydbank (DKK Payments)
BIC: SYBKDK22
IBAN: DK02 8072 0001 0403 60



Quotation **Q110060001-5**
43327028 DELTA TECH GmbH, Hamburg

Page 3 / 21
20/09/2024

Detailed quotation

Line	Qty Unit	Item	Your item number	Delivery time	Unit price	per	Net value
010	2,0000	Pcs		~ 10 weeks	415,96	/1	831,92

233.30-E-8V425Z-ND-UZHZZZ-ZZZ1ZZZ
CERT22-EG2D-AA- - - - -
CERT31-EG2D-AB-BB-CF- - - - -
LABEL-PG2DE-ZZZZZ
Bourdon Tube Pressure Gauges, Safety Pattern
Series EN 837-1
Model: 233.30
Specifications according to data sheet: PM 02.04
Measuring system: stainless steel
Case filling: with
Nominal size: 100 mm
Measuring range: vacuum- or compound-range
Scale range: -1...+24 barg
Process connection: 1/2 NPT
Connector location: lower mount
Window: laminated safety glass
Pointer: adjustable pointer
Accuracy class: class 1.0
Case material: Stainless steel 316TI
Material pressure element: Measuring System 316L
Case filling fluid: glycerine
Ingress protection: IP 65
Permissible medium temperature: + 100 °C
Permissible ambient temperature: -20 ... +60 °C
Pressure Gauge Standard: International (standard Europe)
with Serial number
Permissible ambient temperature: -20 ... +60 °C
Test report 2.2 per EN 10204
Certificate Language: English and German
Certificate for: pressure gauge
Formal certificate: Manufactured according to state-of-the-art
Inspection certificate 3.1 per EN 10204
Certificate type: Inspection certificate acc. to DIN EN 10204 3.1
Certificate Language: English and German
Certificate for: pressure gauge
Accuracy: Calibration values listed
Material certificate: Wetted parts material (metal contents) with mill certificate incl. chemical analysis
Pressure and stability test: 1.3 x full scale range; duration 5 minutes

Note :

- 1) Required case material is SS316, offered case material is SS316TI.
- 2) Required permissible medium temp. -45 to 120 DegC, not possible to offered because of offered glycerin filled pressure gauge sustain -20 ... +100 °C.
- 3) Offered accuracy: Calibration value listed is a 5-point calibration.

TAG-1 (SS tag plate)
PG-RU0001A-01; PG-RU0001B-01
Customs tariff number: 90262040

Discount 17,00%

-141,43

WIKAI Alexander Wiegand SE & Co. KG
Alexander-Wiegand-Straße 30
63911 Klingenberg
Germany
Phone +49 9372 132-0
Fax +49 9372 132-406
info@wika.de
www.wika.de
WEEE-Reg-Nr. DE 92770372
VAT.No.: DE131878642

Limited partnership company:
Place of business Klingenberg
Local court Aschaffenburg HRA 1819
General partner:
WIKAI International SE – Pöb Klingenberg
Local court Aschaffenburg HRB 10505
Chairman of the board: Alexander Wiegand
Chairman of the supervisory board: Prof. Dr. Roderich C. Thümmel

Bank account:
Commerzbank Aschaffenburg
BIC: COBADEFF795
IBAN DE57 7954 0049 0104 1177 00
Sparkasse Aschaffenburg Miltenberg
BIC: BYLADEM1ASA
IBAN: DE95 7955 0000 0430 1062 94
Sydbank (DKK Payments)
BIC: SYBKDK22
IBAN: DK02 8072 0001 0403 60



Quotation **Q110060001-5**
 43327028 DELTA TECH GmbH, Hamburg

Page 4 / 21
 20/09/2024

Detailed quotation

Line	Qty	Unit	Item	Your item number	Delivery time	Unit price	per	Net value
			Tag plates			6,00		
			Test report 2.2 per EN 10204			13,17		
			Line total			709,66		

Link to product details

https://en-co.wika.de/232_30_233_30_en_co.WIKA

020	2,0000	Pcs			~ 10 weeks	1.917,21	/1	3.834,42
			IPT-20-AIA-AIZBZ-H2-BV441-GLYSYZS1-ZZS-1Z CERT22-EGPT-AA- - - - - - CERT31-EGPT-AB-BB-CF- - - - - Industrial process transmitter IPT-2x with metallic sensor element Model: IPT-20 Specifications according to data sheet: PE 86.06 Measuring range: adjustable with turn down up to 100 : 1 Process connection type: Standard connection with pressure port Electrical approval: ATEX Ignition protection type: Ex i - intrinsically safe Zone: Zone 0 gas [II 1G Ex ia IIC T6...T1 Ga] Housing material: Aluminum single chamber Case version: compact/ IP66/IP67; NEMA 4X Digital Display: with integrated indicating/adjustment module (top) Output signal: 4...20 mA, 2-wire, HART Electrical connection: M20x1,5 / cable gland brass nickel plated (ø5-9mm) Measuring range: -1...+40 bar gauge Accuracy: 0.1 % of span process connection form: Gauge connection open Process connection / wetted parts: Thread ½NPT PN1000, ASME B1.20.1 / 316L Sealing: without, -40 ... +105°C Clean specification: without Filling of sensor: synthetic oil Certification sterile processes: without Wetted parts: stainless steel Certificates/Approvals: with certificate or approval Unit scaling: bar lower scaling prefix: - Scaling lower value: 1.00 upper scaling prefix: + Scaling high value: 10.30 Density unit: kg/dm³ Mounting device: Mounting bracket for wall and pipe mounting (stainless steel) (for 2" pipe) Sensor principle: piezoresistiv Test report 2.2 per EN 10204 Certificate Language: English and German Certificate for: process pressure transmitter Formal certificate: Manufactured according to state-of-the-art Inspection certificate 3.1 per EN 10204 Certificate type: Inspection certificate acc. to DIN EN 10204 3.1 Certificate Language: English and German Certificate for: process pressure transmitter Accuracy: Calibration values listed Material certificate: Wetted parts material (metal contents) with mill certificate incl. chemical					

WIKAI Alexander Wiegand SE & Co. KG
 Alexander-Wiegand-Straße 30
 63911 Klingenberg
 Germany
 Phone +49 9372 132-0
 Fax +49 9372 132-406
 info@wika.de
 www.wika.de
 WEEE-Reg-Nr. DE 92770372
 VAT.No.: DE131878642

Limited partnership company:
 Place of business Klingenberg
 Local court Aschaffenburg HRA 1819
 General partner:
 WIKAI International SE – Pöb Klingenberg
 Local court Aschaffenburg HRB 10505
 Chairman of the board: Alexander Wiegand
 Chairman of the supervisory board: Prof. Dr. Roderich C. Thümmel

Bank account:
 Commerzbank Aschaffenburg
 BIC: COBADEFF795
 IBAN DE57 7954 0049 0104 1177 00
 Sparkasse Aschaffenburg Miltenberg
 BIC: BYLADEM1ASA
 IBAN: DE95 7955 0000 0430 1062 94
 Sydbank (DKK Payments)
 BIC: SYBKDK22
 IBAN: DK02 8072 0001 0403 60

Quotation **Q110060001-5**
 43327028 DELTA TECH GmbH, Hamburg

Page 5 / 21
 20/09/2024

Detailed quotation

Line	Qty	Unit	Item	Your item number	Delivery time	Unit price	per	Net value	
			analysis Pressure and stability test: 1.3 x full scale range; duration 5 minutes						
			Deviation: 1) Required element material stainless steel and Hastelloy offered stainless steel, please check 2) IPT-20 suitable temp. is -40 DegC 3) Required Wetted O-Rings Material : Teflon-coated 316L: not offered 4) Housing material is: Single chamber case, powder-coated aluminium 5) Accuracy: Calibration values listed : this certificate is 5- point calibration 6) Quotated pressure transmitter process connection is 1/2" NPT M. TAG-1 (SS tag plate) PIT-RU0001A-01; PIT-RU0001B-01 Customs tariff number: 90262020						
						Discount 17,00%		-651,85	
						Tag plates		6,00	
						Test report 2.2 per EN 10204		13,17	
						Line total		3.201,74	

Link to product details

https://en-co.wika.de/ipt_20_ipt_21_en_co.WIKA

030	8,0000	Pcs	IPT-20-AIA-AIZBZ-H2-BV441-GLYSYZS1-ZZS-1Z CERT22-EGPT-AA- - - - - - CERT31-EGPT-AB-BB-CF- - - - - -		~ 10 weeks	1.917,21	/1	15.337,68
			Industrial process transmitter IPT-2x with metallic sensor element Model: IPT-20 Specifications according to data sheet: PE 86.06 Measuring range: adjustable with turn down up to 100 : 1 Process connection type: Standard connection with pressure port Electrical approval: ATEX Ignition protection type: Ex i - intrinsically safe Zone: Zone 0 gas [II 1G Ex ia IIC T6...T1 Ga] Housing material: Aluminum single chamber Case version: compact/ IP66/IP67; NEMA 4X Digital Display: with integrated indicating/adjustment module (top) Output signal: 4...20 mA, 2-wire, HART Electrical connection: M20x1,5 / cable gland brass nickel plated (ø5-9mm) Measuring range: -1...+40 bar gauge Accuracy: 0.1 % of span process connection form: Gauge connection open Process connection / wetted parts: Thread ½NPT PN1000, ASME B1.20.1 / 316L Sealing: without, -40 ... +105°C Clean specification: without Filling of sensor: synthetic oil Certification sterile processes: without Wetted parts: stainless steel Certificates/Approvals: with certificate or approval Unit scaling: bar lower scaling prefix: -					

WIKAI Alexander Wiegand SE & Co. KG
 Alexander-Wiegand-Straße 30
 63911 Klingenberg
 Germany
 Phone +49 9372 132-0
 Fax +49 9372 132-406
 info@wika.de
 www.wika.de
 WEEE-Reg-Nr. DE 92770372
 VAT.No.: DE131878642

Limited partnership company:
 Place of business Klingenberg
 Local court Aschaffenburg HRA 1819
 General partner:
 WIKAI International SE – Pöb Klingenberg
 Local court Aschaffenburg HRB 10505
 Chairman of the board: Alexander Wiegand
 Chairman of the supervisory board: Prof. Dr. Roderich C. Thümmel

Bank account:
 Commerzbank Aschaffenburg
 BIC: COBADEFF795
 IBAN DE57 7954 0049 0104 1177 00
 Sparkasse Aschaffenburg Miltenberg
 BIC: BYLADEM1ASA
 IBAN: DE95 7955 0000 0430 1062 94
 Sydbank (DKK Payments)
 BIC: SYBKDK22
 IBAN: DK02 8072 0001 0403 60

Detailed quotation

Line	Qty	Unit	Item	Your item number	Delivery time	Unit price	per	Net value	
			Scaling lower value: 1.00 upper scaling prefix: + Scaling high value: 27.60 Density unit: kg/dm ³ Mounting device: Mounting bracket for wall and pipe mounting (stainless steel) (for 2" pipe) Sensor principle: piezoresistiv Test report 2.2 per EN 10204 Certificate Language: English and German Certificate for: process pressure transmitter Formal certificate: Manufactured according to state-of-the-art Inspection certificate 3.1 per EN 10204 Certificate type: Inspection certificate acc. to DIN EN 10204 3.1 Certificate Language: English and German Certificate for: process pressure transmitter Accuracy: Calibration values listed Material certificate: Wetted parts material (metal contents) with mill certificate incl. chemical analysis Pressure and stability test: 1.3 x full scale range; duration 5 minutes Deviation: 1) Required element material stainless steel and Hastelloy offered stainless steel, please check 2) Required Wetted O-Rings Material : Teflon-coated 316L: not offered 3) Housing material is: Single chamber case, powder-coated aluminium 4) Accuracy: Calibration values listed : this certificate is 5- point calibration TAG-1 (SS tag plate) PIT-RU0001A-02; PIT-RU0001B-02; PIT-RU0001A-03; PIT-RU0001B-03; PIT-RU0001A-05; PIT-RU0001B-05; PIT-RU0001A-06; PIT-RU0001B-06 Customs tariff number: 90262020 Discount 17,00% -2.607,41 Tag plates 24,00 Test report 2.2 per EN 10204 13,17 Line total 12.767,44						

Link to product details

https://en-co.wika.de/ipt_20_ipt_21_en_co.WIKA

040	2,0000	Pcs			~ 10 weeks	1.917,21	/1	3.834,42	
			IPT-20-AIA-AIZBZ-H2-BV441-GLYSYZS1-ZZS-1Z CERT22-EGPT-AA- - - - - - - - - - - CERT31-EGPT-AB-BB-CF- - - - - - - - - - - Industrial process transmitter IPT-2x with metallic sensor element Model: IPT-20 Specifications according to data sheet: PE 86.06 Measuring range: adjustable with turn down up to 100 : 1 Process connection type: Standard connection with pressure port Electrical approval: ATEX Ignition protection type: Ex i - intrinsically safe Zone: Zone 0 gas [II 1G Ex ia IIC T6...T1 Ga] Housing material: Aluminum single chamber						

WIKAI Alexander Wiegand SE & Co. KG
 Alexander-Wiegand-Straße 30
 63911 Klingenberg
 Germany
 Phone +49 9372 132-0
 Fax +49 9372 132-406
 info@wika.de
 www.wika.de
 WEEE-Reg-Nr. DE 92770372
 VAT.No.: DE131878642

Limited partnership company:
 Place of business Klingenberg
 Local court Aschaffenburg HRA 1819
 General partner:
 WIKAI International SE – Pöb Klingenberg
 Local court Aschaffenburg HRB 10505
 Chairman of the board: Alexander Wiegand
 Chairman of the supervisory board: Prof. Dr. Roderich C. Thümmel

Bank account:
 Commerzbank Aschaffenburg
 BIC: COBADEFF795
 IBAN DE57 7954 0049 0104 1177 00
 Sparkasse Aschaffenburg Miltenberg
 BIC: BYLADEM1ASA
 IBAN: DE95 7955 0000 0430 1062 94
 Sydbank (DKK Payments)
 BIC: SYBKDK22
 IBAN: DK02 8072 0001 0403 60

Quotation **Q110060001-5**
 43327028 DELTA TECH GmbH, Hamburg

Page 7 / 21
 20/09/2024

Detailed quotation

Line	Qty	Unit	Item	Your item number	Delivery time	Unit price	per	Net value	
			Case version: compact/ IP66/IP67; NEMA 4X Digital Display: with integrated indicating/adjustment module (top) Output signal: 4...20 mA, 2-wire, HART Electrical connection: M20x1,5 / cable gland brass nickel plated (ø5-9mm) Measuring range: -1...+40 bar gauge Accuracy: 0.1 % of span process connection form: Gauge connection open Process connection / wetted parts: Thread ½NPT PN1000, ASME B1.20.1 / 316L Sealing: without, -40 ... +105°C Clean specification: without Filling of sensor: synthetic oil Certification sterile processes: without Wetted parts: stainless steel Certificates/Approvals: with certificate or approval Unit scaling: bar lower scaling prefix: - Scaling lower value: 1.00 upper scaling prefix: + Scaling high value: 27.60 Density unit: kg/dm³ Mounting device: Mounting bracket for wall and pipe mounting (stainless steel) (for 2" pipe) Sensor principle: piezoresistiv Test report 2.2 per EN 10204 Certificate Language: English and German Certificate for: process pressure transmitter Formal certificate: Manufactured according to state-of-the-art Inspection certificate 3.1 per EN 10204 Certificate type: Inspection certificate acc. to DIN EN 10204 3.1 Certificate Language: English and German Certificate for: process pressure transmitter Accuracy: Calibration values listed Material certificate: Wetted parts material (metal contents) with mill certificate incl. chemical analysis Pressure and stability test: 1.3 x full scale range; duration 5 minutes Deviation: 1) Required element material stainless steel and Hastelloy offered stainless steel, please check 2)Required Wetted O-Rings Material : Teflon-coated 316L: not offered 3)Accuracy: Calibration values listed : this certificate is 5- point calibration TAG-1 (SS tag plate) PIT-RU0001A-04; PIT-RU0001B-04 Customs tariff number: 90262020 Discount 17,00% -651,85 Tag plates 6,00 Test report 2.2 per EN 10204 13,17 Line total 3.201,74						

Link to product details

https://en-co.wika.de/ipt_20_ipt_21_en_co.WIKA

WIKA Alexander Wiegand SE & Co. KG
 Alexander-Wiegand-Straße 30
 63911 Klingenberg
 Germany
 Phone +49 9372 132-0
 Fax +49 9372 132-406
 info@wika.de
 www.wika.de
 WEEE-Reg-Nr. DE 92770372
 VAT.No.: DE131878642

Limited partnership company:
 Place of business Klingenberg
 Local court Aschaffenburg HRA 1819
 General partner:
 WIKA International SE – Pob Klingenberg
 Local court Aschaffenburg HRB 10505
 Chairman of the board: Alexander Wiegand
 Chairman of the supervisory board: Prof. Dr. Roderich C. Thümmel

Bank account:
 Commerzbank Aschaffenburg
 BIC: COBADEFF795
 IBAN DE57 7954 0049 0104 1177 00
 Sparkasse Aschaffenburg Miltenberg
 BIC: BYLADEM1ASA
 IBAN: DE95 7955 0000 0430 1062 94
 Sydbank (DKK Payments)
 BIC: SYBKDK22
 IBAN: DK02 8072 0001 0403 60

Detailed quotation

Line	Qty	Unit	Item	Your item number	Delivery time	Unit price	per	Net value
060	2,0000	Pcs	TW15-H-A-M-BC-SI-00070-00050-G3-A-0160-0130-1O-1Z CERT31-EG3A-BB-CB- - - - - - CERT22-EG33-AA- - - - - - TR12-B-AICZ-13HS-5X2AX-6L-MTAE-15000120-60RZ-CZ CERT31-EG3D-AC- - - - - - T32.1S.OIS-Z-5-KKS-ZZZ-Z T32KONF-1PS1003-CEHZZZ-ANNBNB00-Z TR12-B, Process resistance thermometer for additional thermowell Specifications according to data sheet: TE 60.17 Electrical approval: ATEX Ignition protection type: Ex i Zone 1 gas [II 2G Ex ia IIC T1...T6 Gb] 1xPt100, 3-wire Class A, IEC 60751 Temperature range of selected class: -100...+450°C Head / housing: 5/6000, Aluminum, screw cover with digital temp. indicator DIH50 Thread size cable entry: 2x M20 x 1.5 Cable entry A: Thread (female) Cable entry B: Closing plug Transmitter: T32, Digital-transmitter, HART®, 4...20 mA, universal programmable Neck design: Nipple-Union-Nipple Connection to housing / head: Male thread M20 x 1,5, with adjustable lock nut Connection to thermowell: Male thread M20 x 1,5 Neck length [N/MH]: 150 mm (approx. 6.0 inch) Insertion length [A/L/U2]: 120 mm Diameter measuring insert: 6 mm Sheath material measuring insert: Stainless steel 1.4571 Measuring insert length (spare) [I5]: 288 mm Threaded Thermowell TW15, solid machined Specifications according to data sheet: TW 95.15 Head design: Hexagon Thermowell style: Tapered Unit of measure: Metric (mm) Process thread [P or E]: 1/2 BSPT Connection to thermometer [N]: M20 x 1,5 female Insertion length [U]: 70 mm Head length [H]: 50 mm Material: Stainless steel 316/316L Bore size [B or d1]: 0.260 inch (6.6 mm) Root diameter [Q]: 16 mm Tip diameter [V or F3]: 13 mm RTD / TC / Thermometer Assembly: TR12-B, Process resistance thermometer for additional thermowell Bore depth / stem length (US) [A]: 113 mm Tip thickness [Tt]: 0.250 inch (6.4 mm) Digital temperature transmitter T32 with HART-protocol Specifications according to data sheet: TE 32.04 Output signal: 4 ... 20 mA, 2-wire-design Input: configurable by means of software Measuring range: configurable by means of software Model: T32.1S, head mounting Explosion protection: Ex ia, for ATEX/IEC/CSA/FM/EAC/KOSHA/NEPSI/INMETRO/PESO		~ 10 weeks	1.468,10	/1	2.936,20

WIKAI Alexander Wiegand SE & Co. KG
 Alexander-Wiegand-Straße 30
 63911 Klingenberg
 Germany
 Phone +49 9372 132-0
 Fax +49 9372 132-406
 info@wika.de
 www.wika.de
 WEEE-Reg-Nr. DE 92770372
 VAT.No.: DE131878642

Limited partnership company:
 Place of business Klingenberg
 Local court Aschaffenburg HRA 1819
 General partner:
 WIKAI International SE – Pöb Klingenberg
 Local court Aschaffenburg HRB 10505
 Chairman of the board: Alexander Wiegand
 Chairman of the supervisory board: Prof. Dr. Roderich C. Thümmel

Bank account:
 Commerzbank Aschaffenburg
 BIC: COBADEFF795
 IBAN DE57 7954 0049 0104 1177 00
 Sparkasse Aschaffenburg Miltenberg
 BIC: BYLADEM1ASA
 IBAN: DE95 7955 0000 0430 1062 94
 Sydbank (DKK Payments)
 BIC: SYBKDK22
 IBAN: DK02 8072 0001 0403 60

Quotation **Q110060001-5**
 43327028 DELTA TECH GmbH, Hamburg

Page 9 / 21
 20/09/2024

Detailed quotation

Line	Qty	Unit	Item	Your item number	Delivery time	Unit price	per	Net value
------	-----	------	------	------------------	---------------	------------	-----	-----------

Please add
 Certificate: calibration values
 listed

SIL-Statement: not for SIL applications
 HART revision: HART@ 5
 Configuration: customer's specification
 Permissible ambient temperature [Transmitter]: -40 °C ... +85 °C
 Transmitter configuration:
 Input: resistance thermometer Pt100
 Sensors: Single-sensor
 Sensor-calculation-functionality: Sensor 1, Sensor 2 not available
 Sensor-Drift-Detection: not active
 Input configuration: 3-wire
 Unit: °C
 Measuring range: -50 °C ... +150 °C
 Output signal: 4 ... 20 mA, linear to temperature
 Lower output limit: to NAMUR (3,8 mA)
 Upper output limit: to NAMUR (20,5 mA)
 Current value for signalling down scale: 3,5 mA (NAMUR down scale)
 Current value for signalling up scale: 21,5 mA (NAMUR up scale)
 Signalling of error: down scale (uniform for all kinds of errors)
 Damping: off
 Test certificate acc. to EN 10204 2.2
 Certificate Language: English and German
 Thermowell / protection tube
 Formal certificate: Manufactured according to state-of-the-art
 Inspection certificate acc. to DIN EN 10204 3.1
 Certificate Language: English and German
 Thermowell / protection tube
 Material certificate: Wetted parts material (metal contents) with mill certificate incl. chemical analysis
 Pressure and stability test: Hydrostatic, internal pressure - 3 min.
 Inspection certificate acc. to DIN EN 10204 3.1
 Certificate Language: English and German
 Measuring insert / probe with transmitter
 Accuracy: 2 test points (0°C / 100° C) for RTD

100

3 point calibration
 (0/50/100)

- Deviation:
- 1) Offered Neck length [N/MH]: 150 mm (approx. 6.0 inch) instead of 50 mm, please check and confirm.
 - 2) Clarification: 70 mm is a thermowell U length and 120 mm is a sensor length (i.e. U length + H Length= sensor A length).
 - 3) Ingress protection : IP66.
 - 4) Housing material is Aluminum painted

TAG-1 (SS tag plate)
 TIT-RU0001A-01; TIT-RU0001B-01
 Customs tariff number: 90251900

Discount 17,00%	-499,15
Tag plates	6,00
Test report 2.2 per EN 10204	13,17
Line total	2.456,22

WIKAI Alexander Wiegand SE & Co. KG
 Alexander-Wiegand-Straße 30
 63911 Klingenberg
 Germany
 Phone +49 9372 132-0
 Fax +49 9372 132-406
 info@wika.de
 www.wika.de
 WEEE-Reg-Nr. DE 92770372
 VAT.No.: DE131878642

Limited partnership company:
 Place of business Klingenberg
 Local court Aschaffenburg HRA 1819
 General partner:
 WIKAI International SE – Pöb Klingenberg
 Local court Aschaffenburg HRB 10505
 Chairman of the board: Alexander Wiegand
 Chairman of the supervisory board: Prof. Dr. Roderich C. Thümmel

Bank account:
 Commerzbank Aschaffenburg
 BIC: COBADEFF795
 IBAN DE57 7954 0049 0104 1177 00
 Sparkasse Aschaffenburg Miltenberg
 BIC: BYLADEM1ASA
 IBAN DE95 7955 0000 0430 1062 94
 Sydbank (DKK Payments)
 BIC: SYBKDK22
 IBAN: DK02 8072 0001 0403 60



Quotation **Q110060001-5**
 43327028 DELTA TECH GmbH, Hamburg

Page 10 / 21
 20/09/2024

Detailed quotation

Line	Qty	Unit	Item	Your item number	Delivery time	Unit price	per	Net value
070	2,0000	Pcs	<p>Link to product details https://en-co.wika.de/tw15_en_co.WIKA https://en-co.wika.de/tr12_b_tr12_m_en_co.WIKA https://en-co.wika.de/t32_xs_en_co.WIKA</p>		~ 10 weeks	1.447,07	/1	2.894,14
			<p>TW15-H-A-M-BC-SI-00040-00050-G3-A-0160-0130-10-1Z CERT31-EG3A-BB-CB- - - - - - CERT22-EG33-AA- - - - - - TR12-B-AICZ-13HS-5X2AX-6L-MTAE-15000090-60RZ-CZ CERT31-EG3D-AC- - - - - T32.1S.OIS-Z-5-KKS-ZZZ-Z T32KONF-1PS1003-CEHZZZ-ANNBNB00-Z TR12-B, Process resistance thermometer for additional thermowell Specifications according to data sheet: TE 60.17 Electrical approval: ATEX Ignition protection type: Ex i Zone 1 gas [II 2G Ex ia IIC T1...T6 Gb] 1xPt100, 3-wire Class A, IEC 60751 Temperature range of selected class: -100...+450°C Head / housing: 5/6000, Aluminum, screw cover with digital temp. indicator DIH50 Thread size cable entry: 2x M20 x 1.5 Cable entry A: Thread (female) Cable entry B: Closing plug Transmitter: T32, Digital-transmitter, HART®, 4...20 mA, universal programmable Neck design: Nipple-Union-Nipple Connection to housing / head: Male thread M20 x 1,5, with adjustable lock nut Connection to thermowell: Male thread M20 x 1,5 Neck length [N/MH]: 150 mm (approx. 6.0 inch) Insertion length [A/L1/U2]: 90 mm Diameter measuring insert: 6 mm Sheath material measuring insert: Stainless steel 1.4571 Measuring insert length (spare) [I5]: 258 mm Threaded Thermowell TW15, solid machined Specifications according to data sheet: TW 95.15 Head design: Hexagon Thermowell style: Tapered Unit of measure: Metric (mm) Process thread [P or E]: 1/2 BSPT Connection to thermometer [N]: M20 x 1,5 female Insertion length [U]: 40 mm Head length [H]: 50 mm Material: Stainless steel 316/316L Bore size [B or d1]: 0.260 inch (6.6 mm) Root diameter [Q]: 16 mm Tip diameter [V or F3]: 13 mm RTD / TC / Thermometer Assembly: TR12-B, Process resistance thermometer for additional thermowell Bore depth / stem length (US) [A]: 83 mm Tip thickness [Tt]: 0.250 inch (6.4 mm) Digital temperature transmitter T32 with HART-protocol</p>					

WIKAI Alexander Wiegand SE & Co. KG
 Alexander-Wiegand-Straße 30
 63911 Klingenberg
 Germany
 Phone +49 9372 132-0
 Fax +49 9372 132-406
 info@wika.de
 www.wika.de
 WEEE-Reg-Nr. DE 92770372
 VAT.No.: DE131878642

Limited partnership company:
 Place of business Klingenberg
 Local court Aschaffenburg HRA 1819
 General partner:
 WIKAI International SE – Pöb Klingenberg
 Local court Aschaffenburg HRB 10505
 Chairman of the board: Alexander Wiegand
 Chairman of the supervisory board: Prof. Dr. Roderich C. Thümmel

Bank account:
 Commerzbank Aschaffenburg
 BIC: COBADEFF795
 IBAN DE57 7954 0049 0104 1177 00
 Sparkasse Aschaffenburg Miltenberg
 BIC: BYLADEM1ASA
 IBAN: DE95 7955 0000 0430 1062 94
 Sydbank (DKK Payments)
 BIC: SYBKDK22
 IBAN: DK02 8072 0001 0403 60

Detailed quotation

Line	Qty	Unit	Item	Your item number	Delivery time	Unit price	per	Net value
------	-----	------	------	------------------	---------------	------------	-----	-----------

Specifications according to data sheet: TE 32.04
 Output signal: 4 ... 20 mA, 2-wire-design
 Input: configurable by means of software
 Measuring range: configurable by means of software
 Model: T32.1S, head mounting
 Explosion protection: Ex ia, for ATEX/IEC/CSA/FM/EAC/KOSHA/NEPSI/INMETRO/PESO
 SIL-Statement: not for SIL applications
 HART revision: HART@ 5
 Configuration: customer's specification
 Permissible ambient temperature [Transmitter]: -40 °C ... +85 °C
 Transmitter configuration:
 Input: resistance thermometer Pt100
 Sensors: Single-sensor
 Sensor-calculation-functionality: Sensor 1, Sensor 2 not available
 Sensor-Drift-Detection: not active
 Input configuration: 3-wire
 Unit: °C
 Measuring range: -50 °C ... **+150 °C**
 Output signal: 4 ... 20 mA, linear to temperature
 Lower output limit: to NAMUR (3,8 mA)
 Upper output limit: to NAMUR (20,5 mA)
 Current value for signalling down scale: 3,5 mA (NAMUR down scale)
 Current value for signalling up scale: 21,5 mA (NAMUR up scale)
 Signalling of error: down scale (uniform for all kinds of errors)
 Damping: off
 Test certificate acc. to EN 10204 2.2
 Certificate Language: English and German
 Thermowell / protection tube
 Formal certificate: Manufactured according to state-of-the-art
 Inspection certificate acc. to DIN EN 10204 3.1
 Certificate Language: English and German
 Thermowell / protection tube
 Material certificate: Wetted parts material (metal contents) with mill certificate incl. chemical analysis
 Pressure and stability test: Hydrostatic, internal (psig) - 3 min.
 Inspection certificate acc. to DIN EN 10204 3.1
 Certificate Language: English and German
 Measuring insert / probe with transmitter
 Accuracy: **2 test points (0°C / 100° C) for RTD**

Please add
 Certificate: calibration values
 listed

100

3 point calibration
 (0/50/100)

- Deviation:
- 1) Offered Neck length [N/MH]: 150 mm (approx. 6.0 inch) instead of 50 mm, please check and confirm.
 - 2) Clarification: 40 mm is a thermowell U length and 90 mm is a sensor length (i.e. U length + H Length= sensor A length).
 - 3) Ingress protection : IP66.
 - 5) Housing material is Aluminum painted
 TAG-1 (SS tag plate)
 TIT-RU0001A-02; TIT-RU0001B-02
- Customs tariff number: 90251900

Discount 17,00%	-492,00
Tag plates	6,00

WIKAI Alexander Wiegand SE & Co. KG
 Alexander-Wiegand-Straße 30
 63911 Klingenberg
 Germany
 Phone +49 9372 132-0
 Fax +49 9372 132-406
 info@wika.de
 www.wika.de
 WEEE-Reg-Nr. DE 92770372
 VAT.No.: DE131878642

Limited partnership company:
 Place of business Klingenberg
 Local court Aschaffenburg HRA 1819
 General partner:
 WIKAI International SE – Pöb Klingenberg
 Local court Aschaffenburg HRB 10505
 Chairman of the board: Alexander Wiegand
 Chairman of the supervisory board: Prof. Dr. Roderich C. Thümmel

Bank account:
 Commerzbank Aschaffenburg
 BIC: COBADEFF795
 IBAN DE57 7954 0049 0104 1177 00
 Sparkasse Aschaffenburg Miltenberg
 BIC: BYLADEM1ASA
 IBAN: DE95 7955 0000 0430 1062 94
 Sydbank (DKK Payments)
 BIC: SYBKDK22
 IBAN: DK02 8072 0001 0403 60



Quotation **Q110060001-5**
 43327028 DELTA TECH GmbH, Hamburg

Page 12 / 21
 20/09/2024

Detailed quotation

Line	Qty	Unit	Item	Your item number	Delivery time	Unit price	per	Net value
			Test report 2.2 per EN 10204					13,17
			Line total					2.421,31

Link to product details

https://en-co.wika.de/tw15_en_co.WIKA
https://en-co.wika.de/tr12_b_tr12_m_en_co.WIKA
https://en-co.wika.de/t32_xs_en_co.WIKA

080	2,0000	Pcs			~ 10 weeks	1.559,28	/1	3.118,56
			TW15-H-A-M-BC-SI-00200-00050-G3-A-0160-0130-10-1Z CERT31-EG3A-BB-CB- - - - - - CERT22-EG33-AA- - - - - - TR12-B-AICZ-13HS-5X2AX-6L-MTAE-15000250-60RZ-CZ CERT31-EG3D-AC- - - - - - T32.1S.0IS-Z-5-KKS-ZZZ-Z T32KONF-1PS1003-CEHZZZ-ANNBNB00-Z TR12-B, Process resistance thermometer for additional thermowell Specifications according to data sheet: TE 60.17 Electrical approval: ATEX Ignition protection type: Ex i Zone 1 gas [II 2G Ex ia IIC T1...T6 Gb] 1xPt100, 3-wire Class A, IEC 60751 Temperature range of selected class: -100...+450°C Head / housing: 5/6000, Aluminum, screw cover with digital temp. indicator DIH50 Thread size cable entry: 2x M20 x 1.5 Cable entry A: Thread (female) Cable entry B: Closing plug Transmitter: T32, Digital-transmitter, HART®, 4...20 mA, universal programmable Neck design: Nipple-Union-Nipple Connection to housing / head: Male thread M20 x 1,5, with adjustable lock nut Connection to thermowell: Male thread M20 x 1,5 Neck length [N/MH]: 150 mm (approx. 6.0 inch) Insertion length [A/L1/U2]: 250 mm Diameter measuring insert: 6 mm Sheath material measuring insert: Stainless steel 1.4571 Measuring insert length (spare) [I5]: 418 mm Threaded Thermowell TW15, solid machined Specifications according to data sheet: TW 95.15 Head design: Hexagon Thermowell style: Tapered Unit of measure: Metric (mm) Process thread [P or E]: 1/2 BSPT Connection to thermometer [N]: M20 x 1,5 female Insertion length [U]: 200 mm Head length [H]: 50 mm Material: Stainless steel 316/316L Bore size [B or d1]: 0.260 inch (6.6 mm) Root diameter [Q]: 16 mm Tip diameter [V or F3]: 13 mm RTD / TC / Thermometer Assembly: TR12-B, Process resistance thermometer for additional thermowell					

WIKAI Alexander Wiegand SE & Co. KG
 Alexander-Wiegand-Straße 30
 63911 Klingenberg
 Germany
 Phone +49 9372 132-0
 Fax +49 9372 132-406
 info@wika.de
 www.wika.de
 WEEE-Reg-Nr. DE 92770372
 VAT.No.: DE131878642

Limited partnership company:
 Place of business Klingenberg
 Local court Aschaffenburg HRA 1819
 General partner:
 WIKAI International SE – Pöb Klingenberg
 Local court Aschaffenburg HRB 10505
 Chairman of the board: Alexander Wiegand
 Chairman of the supervisory board: Prof. Dr. Roderich C. Thümmel

Bank account:
 Commerzbank Aschaffenburg
 BIC: COBADEFF795
 IBAN DE57 7954 0049 0104 1177 00
 Sparkasse Aschaffenburg Miltenberg
 BIC: BYLADEM1ASA
 IBAN: DE95 7955 0000 0430 1062 94
 Sydbank (DKK Payments)
 BIC: SYBKDK22
 IBAN: DK02 8072 0001 0403 60

Detailed quotation

Line	Qty	Unit	Item	Your item number	Delivery time	Unit price	per	Net value
------	-----	------	------	------------------	---------------	------------	-----	-----------

Bore depth / stem length (US) [A]: 243 mm
 Tip thickness [Tt]: 0.250 inch (6.4 mm)
 Digital temperature transmitter T32
 with HART-protocol
 Specifications according to data sheet: TE 32.04
 Output signal: 4 ... 20 mA, 2-wire-design
 Input: configurable by means of software
 Measuring range: configurable by means of software
 Model: T32.1S, head mounting
 Explosion protection: Ex ia, for ATEX/IEC/CSA/FM/EAC/KOSHA/NEPSI/INMETRO/PESO
 SIL-Statement: not for SIL applications
 HART revision: HART® 5
 Configuration: customer's specification
 Permissible ambient temperature [Transmitter]: -40 °C ... +85 °C
 Transmitter configuration:
 Input: resistance thermometer Pt100
 Sensors: Single-sensor
 Sensor-calculation-functionality: Sensor 1, Sensor 2 not available
 Sensor-Drift-Detection: not active
 Input configuration: 3-wire
 Unit: °C
 Measuring range: -50 °C ... +150 °C
 Output signal: 4 ... 20 mA, linear to temperature
 Lower output limit: to NAMUR (3,8 mA)
 Upper output limit: to NAMUR (20,5 mA)
 Current value for signalling down scale: 3,5 mA (NAMUR down scale)
 Current value for signalling up scale: 21,5 mA (NAMUR up scale)
 Signalling of error: down scale (uniform for all kinds of errors)
 Damping: off
 Test certificate acc. to EN 10204 2.2
 Certificate Language: English and German
 Thermowell / protection tube
 Formal certificate: Manufactured according to state-of-the-art
 Inspection certificate acc. to DIN EN 10204 3.1
 Certificate Language: English and German
 Thermowell / protection tube
 Material certificate: Wetted parts material (metal contents) with mill certificate incl. chemical analysis
 Pressure and stability test: Hydrostatic, internal (0/50/100) 100 psig) - 3 min.
 Inspection certificate acc. to DIN EN 10204 3.1
 Certificate Language: English and German
 Measuring insert / probe with transmitter
 Accuracy: 2 test points (0°C / 100° C) for RTD

Please add
 Certificate: calibration values
 listed

100

3 point calibration
 (0/50/100)

- Deviation:
- 1) Offered Neck length [N/MH]: 150 mm (approx. 6.0 inch) instead of 100 mm, please check and confirm.
 - 2) WFC not performed due to velocity not given.
 - 3) Clarification: 200 mm is a thermowell U length and 250 mm is a sensor length (i.e. U length + H Length= sensor A length).
 - 4) Ingress protection : IP66.
 - 5) Housing material is Aluminum painted
- TAG-1 (SS tag plate)
 TIT-RU0001A-03; TIT-RU0001B-03

WIKAI Alexander Wiegand SE & Co. KG
 Alexander-Wiegand-Straße 30
 63911 Klingenberg
 Germany
 Phone +49 9372 132-0
 Fax +49 9372 132-406
 info@wika.de
 www.wika.de
 WEEE-Reg-Nr. DE 92770372
 VAT.No.: DE131878642

Limited partnership company:
 Place of business Klingenberg
 Local court Aschaffenburg HRA 1819
 General partner:
 WIKAI International SE – Pöb Klingenberg
 Local court Aschaffenburg HRB 10505
 Chairman of the board: Alexander Wiegand
 Chairman of the supervisory board: Prof. Dr. Roderich C. Thümmel

Bank account:
 Commerzbank Aschaffenburg
 BIC: COBADEFF795
 IBAN DE57 7954 0049 0104 1177 00
 Sparkasse Aschaffenburg Miltenberg
 BIC: BYLADEM1ASA
 IBAN: DE95 7955 0000 0430 1062 94
 Sydbank (DKK Payments)
 BIC: SYBKDK22
 IBAN: DK02 8072 0001 0403 60

Detailed quotation

Line	Qty	Unit	Item	Your item number	Delivery time	Unit price	per	Net value
------	-----	------	------	------------------	---------------	------------	-----	-----------

Customs tariff number: 90251900

Discount 17,00%	-530,16
Tag plates	6,00
Test report 2.2 per EN 10204	13,17
Line total	2.607,57

Link to product details

- https://en-co.wika.de/tw15_en_co.WIKA
- https://en-co.wika.de/tr12_b_tr12_m_en_co.WIKA
- https://en-co.wika.de/t32_xs_en_co.WIKA

Please define these codes !

090 2,0000 Pcs

BNA-CMB02200120-0451220A04371CZ
 BNA-BM1GBA521RZZZB2ZZA521B2ZZ
 BMD-CM21220V1PZZ
 BLM-CMFZ5M231220Z3

CERT22-EG87-AA-
 CERT31-EG87-BH-CH-
 CERT31-EG83-A1-
 BNA-2"/300/RF-MG-M1,220-L60x2.77-M
 Magnetic Level Gauge Type BNA-S00C
 Approval: ATEX Ex h; IBExU20ATEX106
 T68°C...T360°C -/Db

Pressure: 22.0 bar ; Temp.: -45 °C...120°C; Fluid density: 137 kg/m³
 Design code: ASME B31.3
 Test pressure: 33 bar

Chamber dimensions: OD 60.3 x 2.77 mm (2
 401/1.4404)

Process connection: Flange ASME B16.5 2" 300# Form RF
 Distance C-to-G: 1220 mm
 Measuring range: 1220 mm
 Chamber end top: Pipe cap

Chamber end bottom: Flange ASME B16.5 2" 300# Form RF
 Vent connection: Needle valve female 3/4"NPT
 Drain connection: Needle valve female 3/4"NPT
 Float: ZTSS355/PN25/R48H

Dampening element: Dampening spring, bottom & top, with cover
 Gasket(s): Spiral wound type, SS 316L/Graphite
 Bolting: UNC series, carbon steel A320 Gr. L7 HDG / A194 Gr. 7 HDG
 Top stand-off (T): 100 mm
 Bottom stand-off (U): 395 mm
 Distance lower process connection to end of the drain: 565 mm (max.)
 Side distance (X): 170 mm (maximal)
 Nameplate: Stainless steel laser printed

MRFV/SVP-M1,220
 Level Indicator for Magnetic Level Gauge Type BMD-FR
 Measuring range: 1220 mm


Please consider 0-100 compared to 0 to 925mm = almost 1 to 1 (Green marked in the attached sketch)

925 is measuring range

UNC series, stainless steel A193 Gr. B8 CL2 / A194 Gr. 8

Please update due to our limitation in space

280

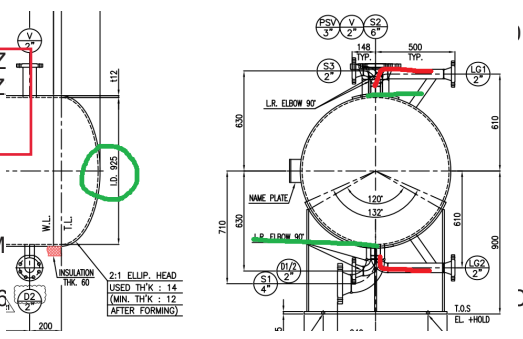

Detailed quotation

Line	Qty	Unit	Item	Your item number	Delivery time	Unit price	per	Net value
------	-----	------	------	------------------	---------------	------------	-----	-----------

Housing material: Stainless steel, 304+316
 Indicating elements: Stainless steel flaps Red & white
 Graduated scale: Stainless steel engraved, left Graduation unit: %
 Indicator window: Makrolon PC
 Float failure indication: With (red-white)

FFG-BP.20H3OD-DTK48

BLM- Standard version to be considered

BLM-TBI-VL1,370/M1,220

Magnetostrictive Level Transmitter for Magnetic Level Gauge Type BLM-TBI
 Approval: ATEX - Ex i ; TÜV 18 ATEX 225120 X II 2 G Ex ia IIC T6...T1 Gb; II 2 D Ex ia IIC TX°C Db
 Ambient temperature: -20°C ... +85°C
 Material housing: Stainless steel IP67
 LCD display: With
 Electrical connection: M20 x 1.5 mm with cable gland
 Output signal: 4-20 mA - HART Ver. 6
 Housing location: Top mounted straight - housing orientation 3 o'clock / 90°
 Guide tube: OD 12 mm
 Measuring range: 1220 mm
 Sensor tube length: 1370 mm

IP67

Bottom mounted angled

Test report 2.2 per EN 10204
 Certificate Language: English and German
 Certificate for: Magnetic level gauge standard
 Formal certificate: Manufactured according to the state of the art
 Inspection certificate 3.1 per EN 10204
 Certificate type: Inspection certificate acc. to DIN EN 10204 3.1
 Certificate Language: English and German
 Certificate for: Magnetic level gauge standard
 Material certificate: Wetted pressure retaining parts material with mill certificate incl. chemical analysis (metals only)
 Hydrostatic pressure test: Internal pressure test
 Inspection certificate 3.1 per EN 10204
 Certificate type: Inspection certificate acc. to DIN EN 10204 3.1
 Certificate Language: English and German
 Certificate for: Level transmitter for magnetic level gauge
 Accuracy: Test report confirming sensor accuracy

 Note: 1.For Vent & Drain, threaded needle valve offered, instead of Flanged ball valve, please confirm
 2.Valve Body and Seat will be SS
 3.Interface float cannot be offered; the density of the upper fluid is very low to design float

TAG-1 (SS tag plate)
 LG-RU0001A-03; LG-RU0001B-03
 TAG-2 (Label (on case))
 LT-RU0001A-03; LT-RU0001B-03
 Customs tariff number: 90261089

Discount 17,00% -3.519,53

WIKAI Alexander Wiegand SE & Co. KG
 Alexander-Wiegand-Straße 30
 63911 Klingenberg
 Germany
 Phone +49 9372 132-0
 Fax +49 9372 132-406
 info@wika.de
 www.wika.de
 WEEE-Reg-Nr. DE 92770372
 VAT.No.: DE131878642

Limited partnership company:
 Place of business Klingenberg
 Local court Aschaffenburg HRA 1819
 General partner:
 WIKAI International SE – Pöb Klingenberg
 Local court Aschaffenburg HRB 10505
 Chairman of the board: Alexander Wiegand
 Chairman of the supervisory board: Prof. Dr. Roderich C. Thümmel

Bank account:
 Commerzbank Aschaffenburg
 BIC: COBADEFF795
 IBAN DE57 7954 0049 0104 1177 00
 Sparkasse Aschaffenburg Miltenberg
 BIC: BYLADEM1ASA
 IBAN: DE95 7955 0000 0430 1062 94
 Sydbank (DKK Payments)
 BIC: SYBKDK22
 IBAN: DK02 8072 0001 0403 60



Quotation **Q110060001-5**
 43327028 DELTA TECH GmbH, Hamburg

Page 16 / 21
 20/09/2024

Detailed quotation

Line	Qty	Unit	Item	Your item number	Delivery time	Unit price	per	Net value
			Tag plates			6,00		
			Test report 2.2 per EN 10204			13,17		
			Line total			17.202,76		

Link to product details

https://en-co.wika.de/bna_en_co.WIKA
https://en-co.wika.de/bna_en_co.WIKA
https://en-co.wika.de/bmd_en_co.WIKA
https://en-co.wika.de/blm_en_co.WIKA

Please delete from list. no need to LG anymore

100	2,0000	Pcs			~ 10 weeks	2.934,76	/1	5.869,52
-----	--------	-----	--	--	------------	----------	----	----------

LGG-CBM02200120-0450762SRPZGZ
 LGG-K2A521G2G13ZZ1P25Z
 CERT22-EG89-AA- - - - - -
 CERT31-EG89-BH-CH- - - - -
 LGG-RP#R207M762V
 Sight glass level indicator, reflex, Carbon-Line
 Pressure: 22.0 bar
 Test pressure: 36 bar
 Temperature range: -45 °C ... 120°C
 Base material: Carbon steel A350LF2 (Bolting metric A4-70)
 Distance C-to-C: 762 mm
 Visible length: 565 mm (2x size 7)
 Glass protection: Acryl glass bar 60 mm
 Graduated scale: Stainless steel engraved, left %
 Gauge valves type: LGV-33, handwheel, with ball check
 Orientation: Top-bottom offset (rotatable) V
 Process connection: Flange ASME B16.5 2" 300# Form RF
 Vent connection: Vent plug 3/4"NPT
 Drain connection: Drain plug 1/2"NPT
 Nameplate: Stainless steel laser printed

Test report 2.2 per EN 10204
 Certificate Language: English and German
 Certificate for: Glass level gauge
 Formal certificate: Manufactured according to the state of the art
 Inspection certificate 3.1 per EN 10204
 Certificate type: Inspection certificate acc. to DIN EN 10204 3.1
 Certificate Language: English and German
 Certificate for: Glass level gauge
 Material certificate: Wetted pressure retaining parts material with mill certificate incl. chemical analysis (metals only)
 Hydrostatic pressure test: Internal pressure test

 Note: Threaded Plug is offered at Vent-Drain connection

TAG-1 (SS tag plate)
 LG-RU0001A-02; LG-RU0001B-02
 Customs tariff number: 90261089

WIKAI Alexander Wiegand SE & Co. KG
 Alexander-Wiegand-Straße 30
 63911 Klingenberg
 Germany
 Phone +49 9372 132-0
 Fax +49 9372 132-406
 info@wika.de
 www.wika.de
 WEEE-Reg-Nr. DE 92770372
 VAT.No.: DE131878642

Limited partnership company:
 Place of business Klingenberg
 Local court Aschaffenburg HRA 1819
 General partner:
 WIKAI International SE – Pöb Klingenberg
 Local court Aschaffenburg HRB 10505
 Chairman of the board: Alexander Wiegand
 Chairman of the supervisory board: Prof. Dr. Roderich C. Thümmel

Bank account:
 Commerzbank Aschaffenburg
 BIC: COBADEFF795
 IBAN DE57 7954 0049 0104 1177 00
 Sparkasse Aschaffenburg Miltenberg
 BIC: BYLADEM1ASA
 IBAN: DE95 7955 0000 0430 1062 94
 Sydbank (DKK Payments)
 BIC: SYBKDK22
 IBAN: DK02 8072 0001 0403 60

Detailed quotation

Line	Qty	Unit	Item	Your item number	Delivery time	Unit price	per	Net value
			Discount 17,00%			-997,82		
			Tag plates			6,00		
			Test report 2.2 per EN 10204			13,17		
			Line total			4.890,87		

Link to product details
https://en-co.wika.de/lgg_en_co.WIKA

110	2,0000	Pcs			~ 10 weeks	663,24	/1	1.326,48
-----	--------	-----	--	--	------------	--------	----	----------

TLS-CBMDZ1000-04001501C1GA3ZZTG2ZZ0077C5Z
 CERT22-EG8T-AA- - - - - -
 CERT31-EG8T-BG- - - - -
 TLS-ADNPTV-3/4"-JT-L90
 Tuning Fork Level Switch TLS-SAD
 Approval: ATEX Ex d
 Temp.: -40°C...150°C
 Material: Stainless steel 316L (DIN 1.4404)
 Power supply: DC 10 ... 30 V
 Output: Relay DPDT
 Electrical connection: Housing Aluminum
 Cable gland: M20x1,5 with cable gland
 Ingress protection: IP66/68
 Process connection: Mounting thread downwards 3/4"NPT

Please note that process connection has been located on side of vessel

Switch position 1: 77 mm
 Insertion length (L): 90 mm
 Extension: 26 mm
 Length of tuning fork: 42 mm

"L" to be considered 150 mm

Nameplate: Stainless steel laser printed
 Test report 2.2 per EN 10204
 Certificate Language: English and German
 Certificate for: Vibrating level switch
 Certificate: Manufactured according to state-of-the-art
 Certificate 3.1 per EN 10204
 Certificate type: Inspection certificate acc. to DIN EN 10204 3.1
 Certificate Language: English and German
 Certificate for: Vibrating level switch
 Material certificate: Wetted parts material (metal contents)

If possible, please provide as sample Drawing or sketch in order to understand these dimension and match dimensions with the project requirement

 Note: We have offered ATEX approval. Kindly confirm suitability

Customs tariff number: 90318080

Discount 17,00%	-225,50
Test report 2.2 per EN 10204	13,17
Line total	1.114,15

Link to product details
https://en-co.wika.de/tls_s_en_co.WIKA

Detailed quotation

Line	Qty Unit	Item	Your item number	Delivery time	Unit price	per	Net value
120	1,0000 Pcs			from stock	590,00	/1	590,00

Documentation for Level Products
 Documentation includes:
 :: WIKA Designation ::
 - Document Index List
 - Dimensional drawings for approval with part list , Group drawings with detail list
 - Cataloge sheet
 - Installation and operating manual (IOM)
 - Pressure test certificate
 - Material certificate 3.1 EN 10204
 - Accuracy test certificate of transmitters
 - Certificate 2.2 EN 10204 (order)
 - ATEX conformity declaration
 - Handling, transport and storage procedure

THIS OFFER DOES NOT INCLUDE FURTHER TESTING OR DOCUMENTATION THAN THE ONES LISTED ABOVE.
 SHOULD FURTHER TESTING OR DOCUMENTATION (WHERE AVAILABLE AND APPLICABLE) BE REQUIRED IT CAN BE OFFERED AT EXTRA CHARGE.
 NO OTHER TYPES OF TEST OR DOCUMENTATON WILL BE PROVIDED LATER AND/OR IN FUTURE, IF NOT PREVIOUSLY AGREED BEFORE ISSUING OF THE POSSIBLE ORDER.

If welding or NDT is on the documentation scope, please be aware:

Welding:

WIKA disposes over all necessary, valid procedure qualification records (PQR) and work samples for the materials offered.

Order-related WPS (Welding Procedure Specification) will only be made available once the associated drawings have been approved.

NDT:

The offered non-destructive tests are carried out according to valid existing WIKA procedures.

These procedures meet the requirements of the relevant DIN and ASME section V standards.

Additional customer requirements (with regards to welding and/or NDT) can be incorporated and included as an annex. Effort will be calculated and invoiced at actual

Customs tariff number: 49119900

130	1,0000 Pcs			from stock	600,00	/1	600,00
-----	------------	--	--	------------	--------	----	--------

Charges for carton packing for Level products

Customs tariff number: 49119900

140	1,0000 Pcs			from stock	590,63	/1	590,63
-----	------------	--	--	------------	--------	----	--------

Documentation for Pressure gauge, ETM and PT

Documentation includes:

- Tag list
- Catalogues (Datasheet)
- Pressure test certificate
- Material certificate 3.1 EN 10204
- Accuracy test certificate of transmitters
- Certificate 2.2 EN 10204 (order)
- Std Drawings
- Operating Instructions (Installation, Operation and Maintenance)

Please add TT and level switch

Please add accuracy test certificate of RTD

Quantity is 2.
We need 2 Converters rail mounted for potentiometer.
Total resistance: 1k Ohm

	Our item number	Delivery time	Unit price	per	Net value
150	6,0000 Pcs	2-3 weeks	725,29	/1	4.351,74

Customs tariff number: 49119900

T32.3S.0IS-Z-7-KKS-ZZZ-Z

T32.3S.0IS-Z-7-KKS-ZZ3-Z
T32KONF-1PS1003-CEDZZZ-ANNBNB00-Z

CERT31-EG3F-AH- - - - -

Digital temperature transmitter T32 with HART-protocol

Specifications according to data sheet: TE 32.04

Output signal: 4 ... 20 mA, 2-wire-design

Input: configurable by means of software

Measuring range: configurable by means of software

Model: T32.3S, rail mounting

Explosion protection: Ex ia, for ATEX/IEC/CSA/FM/EN 60079-0/PESO

SIL-Statement: not for SIL applications

HART revision: HART@ 7

Configuration: customer's specification

Permissible ambient temperature [Transmitter]: -40 °C ... +85 °C

Certificate: calibration values listed

Transmitter configuration:

Input: resistance thermometer Pt100

Sensors: Single-sensor

Sensor-calculation-functionality: Sensor 1, Sensor 2 not available

Sensor-Drift-Detection: not active

Input configuration: 3-wire

Unit: °C

Measuring range: -50 °C ... +100 °C

Output signal: 4 ... 20 mA, linear to temperature

Lower output limit: to NAMUR (3,8 mA)

Upper output limit: to NAMUR (20,5 mA)

Current value for signalling down scale: 3,5 mA (NAMUR down scale)

Current value for signalling up scale: 21,5 mA (NAMUR up scale)

Signalling of error: down scale (uniform for all kinds of errors)

Damping: off

Inspection certificate acc. to DIN EN 10204 3.1

Certificate Language: English and German

Transmitter

Accuracy: 3 test points (start / middle / end of transmitter range)

TAG-1 (SS tag plate)

TIT-RU0001A-01; TIT-RU0001B-01; TIT-RU0001A-02; TIT-RU0001B-02; TIT-RU0001A-03; TIT-RU0001B-03

Customs tariff number: 90259000

Discount 17,00%	-739,80
Tag plates	18,00
Line total	3.629,94

Link to product details
https://en-co.wika.de/t32_xs_en_co.WIKA

Please delete this part

%

Resistance 1K ohm

Potentiometer

0 ... 100%

ZT-RU0001A-01, ZT-RU0001B-01



Quotation Q110060001-5
43327028 DELTA TECH GmbH, Hamburg

Page 20 / 21
20/09/2024

Detailed quotation

Line	Qty Unit	Item	Your item number	Delivery time	Unit price	per	Net value
160	1,0000 Pcs	Charges for carton packing for PG, ETM, and PT package Customs tariff number: 49119900		from stock	1.200,00	/1	1.200,00

	EUR
Net value of goods	68.018,82
Discount	-11.056,56
Position markup	221,70
Packaging	569,62
Total net amount	57.753,58
VAT not included	

Valid until: 07/09/2024

#####

Export Restriction

- (1) The Customer/Recipient shall not, at any time, sell and/or export and/or re-export, directly or indirectly,
 - a) to the Russian Federation; and/or
 - b) to territories occupied by Russian Federation; and/or
 - c) to the Republic of Belarus; and/or
 - d) for use in the Russian Federation; and/or
 - e) for use in territories occupied by Russian Federation; and/or
 - f) for use in the Republic of Belarus
 directly or indirectly any
 - i. item(s) herein listed ("Item(s)"); and/or
 - ii. any intellectual property; and/or
 - iii. know-how; and/or
 - iv. any other confidential information whatsoever supplied or brought to attention to the Customer/Recipient howsoever under or in connection with this Agreement.
- (2) The Customer/Recipient shall undertake its best efforts to ensure that the purpose of paragraph (1) is not frustrated by any third parties further down the commercial chain, including by possible resellers.
- (3) The Customer/Recipient shall set up and maintain an adequate monitoring mechanism to detect conduct by any third parties further down the commercial chain, including by possible resellers, that would frustrate the purpose of paragraph (1).
- (4) Any violation of paragraphs (1), (2) or (3) shall constitute a material breach of an essential element of this Agreement, and WIKAI shall be entitled to seek appropriate remedies, including, but not limited to:
 - i. termination of this Agreement; and/or
 - ii. a penalty of 10 % of the total value of this Agreement or price of the items exported, whichever is higher.
- (5) The Customer/Recipient shall immediately inform WIKAI about any problems in applying paragraphs (1), (2) or (3), including any relevant activities by third parties that could frustrate the purpose of paragraph (1).
The Customer/Recipient shall make available to WIKAI information concerning compliance with the obligations under paragraph (1), (2) and (3) within two weeks of the simple request of such information.

#####

WIKAI Alexander Wiegand SE & Co. KG
 Alexander-Wiegand-Straße 30
 63911 Klingenberg
 Germany
 Phone +49 9372 132-0
 Fax +49 9372 132-406
 info@wika.de
 www.wika.de
 WEEE-Reg-Nr. DE 92770372
 VAT.No.: DE131878642

Limited partnership company:
 Place of business Klingenberg
 Local court Aschaffenburg HRA 1819
 General partner:
 WIKAI International SE – Pöb Klingenberg
 Local court Aschaffenburg HRB 10505
 Chairman of the board: Alexander Wiegand
 Chairman of the supervisory board: Prof. Dr. Roderich C. Thümmel

Bank account:
 Commerzbank Aschaffenburg
 BIC: COBADEFF795
 IBAN DE57 7954 0049 0104 1177 00
 Sparkasse Aschaffenburg Miltenberg
 BIC: BYLADEM1ASA
 IBAN: DE95 7955 0000 0430 1062 94
 Sydbank (DKK Payments)
 BIC: SYBKDK22
 IBAN: DK02 8072 0001 0403 60

